




Romwell sheets are comprised of several layers of unilaterally covered corrugated cardboard, which are laminated onto each other.

They are used as ideal surface padding, to fill cavities and for processing with other romwell padding and corrugated cardboard formats.

Perforated segments can be easily broken off. All sheets can be equipped with self-adhesive lines. Besides the standard romwell sizes, sheets of almost any desired dimensions can be supplied.

Usage of sheets

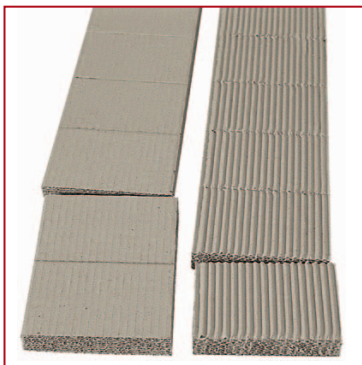

Perforated segments can be easily broken off



Two sheets in the base area form efficient padding for heavy packaged products.



Self-adhesive sheets can be secured to the box in precisely the desired location.

Technical data of sheets

	Minimum	Maximum
Length (corrugation direction)	50 mm	2.400 mm
Width	50 mm	1.200 mm
Thickness	10 mm	100 mm
Perforation	50 mm	2.400 mm

Technical options

- Different paper qualities
- Customer-specific padding values
- Perforation
- Can be combined with other shaped parts
- Self-adhering