


U profiles

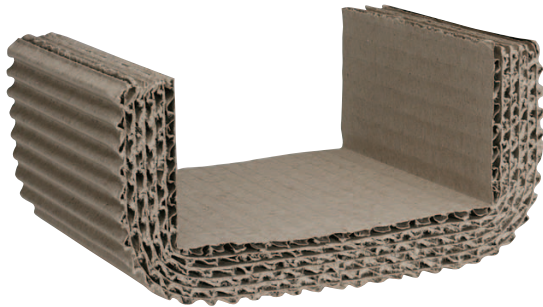

Romwell U profiles are suitable for protecting square packaged products and for inexpensively bridging large cavities.

This protection is restricted to the necessary areas, thereby specifically saving superfluous packaging material.

Depending on the strain to which they are subject, U profiles are available in different paper qualities with diverse padding values.

The U profiles from the standard range have an alternating perforation. The individual segments can be combined to form small shipping boxes. U profiles can be equipped with self-adhesive lines (SAL).

U profiles


Usage of U profiles



To protect square packaged products.



To inexpensively bridge cavities.

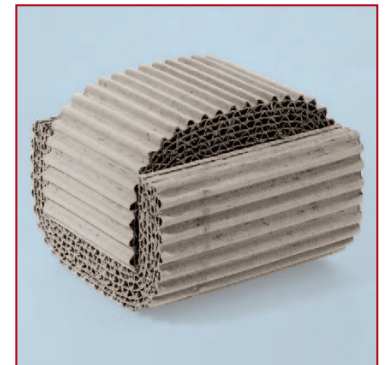

Individual segments can be combined to form padding boxes.

Technical data of U profiles

	Minimum	Maximum
Side, inner	40 mm	200 mm
Gap, inner	80 mm	200 mm
Thickness	10 mm	60 mm
Perforation	50 mm	2.400 mm
Length	50 mm	2.400 mm

Technical options

- Different paper qualities
- Customer-specific padding values
- Perforation
- Can be combined with other shaped parts
- Various side lengths
- Self-adhering on the inner or outer side